


## TO-92 Plastic-Encapsulate Transistors


### 2SA1980 TRANSISTOR (PNP)

#### FEATURES

- Low Collector Saturation Voltage:  $V_{CE(sat)} = -0.3V(\text{Max.})$
- Low Output Capacitance :  $C_{ob} = 4pF$  (Typ.)
- Complementary Pair with 2SC5343

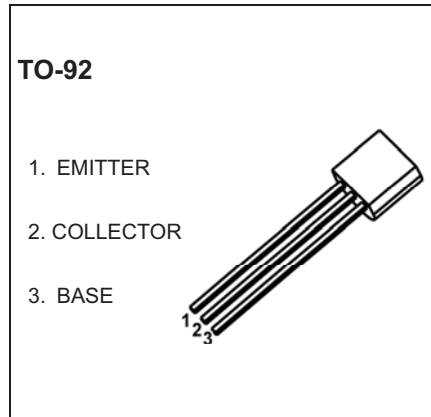


#### MARKING

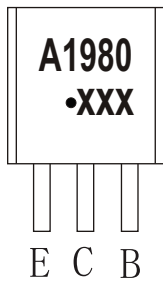

A1980=Device code  
 Solid dot=Green molding compound device,  
 if none,the normal device  
 XXX=Code

#### Equivalent Circuit



#### ORDERING INFORMATION

| Part Number | Package | Packing Method | Pack Quantity |
|-------------|---------|----------------|---------------|
| 2SA1980     | TO-92   | Bulk           | 1000pcs/Bag   |
| 2SA1980-TA  | TO-92   | Tape           | 2000pcs/Box   |

#### MAXIMUM RATINGS ( $T_a=25^{\circ}C$ unless otherwise noted)

| Symbol          | Parameter                                   | Value    | Unit           |
|-----------------|---|----------|----------------|
| $V_{CBO}$       | Collector-Base Voltage                      | -50      | V              |
| $V_{CEO}$       | Collector-Emitter Voltage                   | -50      | V              |
| $V_{EBO}$       | Emitter-Base Voltage                        | -5       | V              |
| $I_c$           | Collector Current -Continuous               | -0.15    | A              |
| $P_D$           | Collector Power Dissipation                 | 625      | mW             |
| $R_{\theta JA}$ | Thermal Resistance from Junction to Ambient | 200      | $^{\circ}C /W$ |
| $T_j$           | Junction Temperature                        | 150      | $^{\circ}C$    |
| $T_{stg}$       | Storage Temperature                         | -55~+150 | $^{\circ}C$    |

## ELECTRICAL CHARACTERISTICS

$T_a=25^\circ\text{C}$  unless otherwise specified

| Parameter                            | Symbol        | Test conditions   | Min | Typ | Max  | Unit          |
|--------------------------------------|---------------|---|-----|-----|------|---------------|
| Collector-base breakdown voltage     | $V_{(BR)CBO}$ | $I_C=-100\mu\text{A}, I_E=0$  | -50 |     |      | V             |
| Collector-emitter breakdown voltage  | $V_{(BR)CEO}$ | $I_C=-10\text{mA}, I_B=0$   | -50 |     |      | V             |
| Emitter-base breakdown voltage       | $V_{(BR)EBO}$ | $I_E=-10\mu\text{A}, I_C=0$   | -5  |     |      | V             |
| Collector cut-off current            | $I_{CBO}$     | $V_{CB}=-50\text{V}, I_E=0$   |     |     | -0.1 | $\mu\text{A}$ |
| Collector cut-off current            | $I_{CEO}$     | $V_{EB}=-5\text{V}, I_C=0$  |     |     | -0.1 | $\mu\text{A}$ |
| DC current gain                      | $h_{FE}$      | $V_{CE}=-6\text{V}, I_C=-2\text{mA}$  | 70  |     | 700  |               |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | $I_C=-100\text{mA}, I_B=-10\text{mA}$                                       |     |     | -0.3 | V             |
| Transition frequency                 | $f_T$         | $V_{CE}=-10\text{V}, I_C=-1\text{mA}$                                       | 80  |     |      | MHz           |
| Collector output capacitance         | $C_{ob}$      | $V_{CB}=-10\text{V}, I_E=0, f=1\text{MHz}$                                  |     | 4   | 7    | pF            |
| Noise figure                         | NF            | $V_{CE}=-6\text{V}, I_C=-0.1\text{mA}, f=1\text{KHz}, R_S=10\text{K}\Omega$ |     |     | 10   | dB            |

### CLASSIFICATION OF $h_{FE}$


| Rank  | O      | Y       | G       | L       |
|-------|--------|---------|---------|---------|
| Range | 70-140 | 120-240 | 200-400 | 300-700 |

## TO-92 Package Outline Dimensions



| Symbol | Dimensions In Millimeters |        | Dimensions In Inches |       |
|--------|---------------------------|--------|----------------------|-------|
|        | Min                       | Max    | Min                  | Max   |
| A      | 3.300                     | 3.700  | 0.130                | 0.146 |
| A1     | 1.100                     | 1.400  | 0.043                | 0.055 |
| b      | 0.380                     | 0.550  | 0.015                | 0.022 |
| c      | 0.360                     | 0.510  | 0.014                | 0.020 |
| D      | 4.300                     | 4.700  | 0.169                | 0.185 |
| D1     | 3.430                     |        | 0.135                |       |
| E      | 4.300                     | 4.700  | 0.169                | 0.185 |
| e      | 1.270 TYP                 |        | 0.050 TYP            |       |
| e1     | 2.440                     | 2.640  | 0.096                | 0.104 |
| L      | 14.100                    | 14.500 | 0.555                | 0.571 |
| Φ      |                           | 1.600  |                      | 0.063 |
| h      | 0.000                     | 0.380  | 0.000                | 0.015 |

## TO-92 Suggested Pad Layout

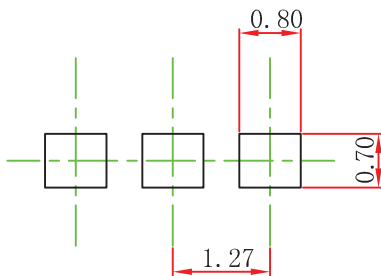

### Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.

### NOTICE


JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

# TO-92 Tape and Reel



Dimensions are in millimeter

| A1  | A   | T        | P    | P0   | P2   | F1  | F2  | W          |
|-----|-----|----------|------|------|------|-----|-----|------------|
| 4.5 | 4.5 | 3.5      | 12.7 | 12.7 | 6.35 | 2.5 | 2.5 | 18.0       |
| W0  | W1  | W2       | H    | H0   | D0   | t1  | t2  | $\Delta P$ |
| 6.0 | 9.0 | 1.0 MAX. | 19.0 | 16.0 | 4.0  | 0.4 | 0.2 | 0          |

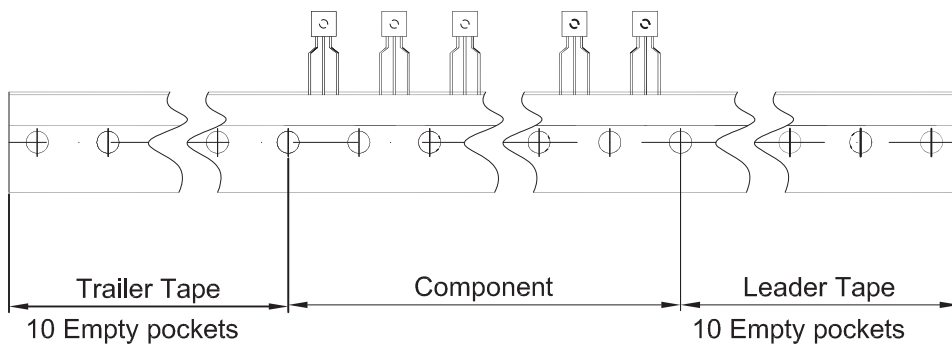

| Package | Box      | Box Size(mm) | Carton     | Carton Size(mm) |
|---------|----------|--------------|------------|-----------------|
| TO-92   | 2000 pcs | 333×162×43   | 20,000 pcs | 350×340×250     |