




## TO-92L Plastic-Encapsulate Transistors


**2SC2383** TRANSISTOR (NPN)

### FEATURE


- High Voltage:  $V_{CE0}=160V$
- Large Continuous Collector Current Capability
- Complementary to 2SA1013

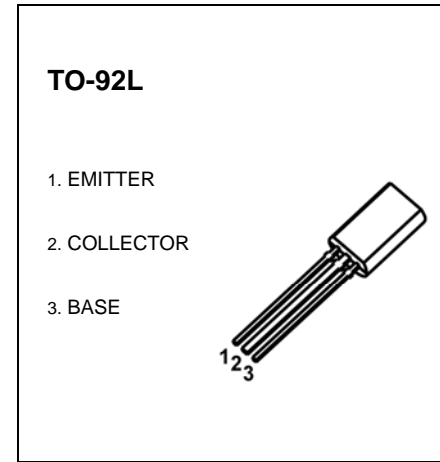

### MARKING

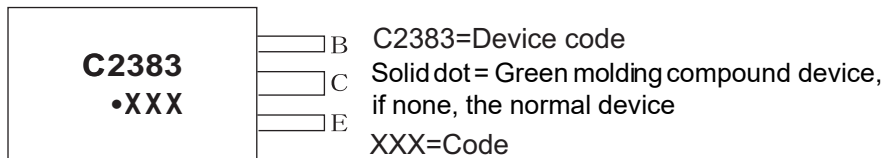

### Equivalent Circuit



### ORDERING INFORMATION

Part Number	Package	Packing Method	Pack Quantity
2SC2383	TO-92L	Bulk	500pcs/Bag
2SC2383-TA	TO-92L	Tape	2000pcs/Box

### MAXIMUM RATINGS ( $T_a=25\text{ }^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
$V_{CBO}$	Collector-Base Voltage	160	V
$V_{CEO}$	Collector-Emitter Voltage	160	V
$V_{EBO}$	Emitter-Base Voltage	6	V
$I_C$	Collector Current -Continuous	1	A
$P_C$	Collector Power Dissipation	0.75	W
$T_J, T_{stg}$	Operation Junction and Storage Temperature Range	-55 to +150	$^{\circ}\text{C}$

## ELECTRICAL CHARACTERISTICS








$T_a=25^\circ\text{C}$  unless otherwise specified

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	$V(\text{BR})_{\text{CBO}}$	$I_{\text{C}}=100\mu\text{A}, I_{\text{E}}=0$	160		V
Collector-emitter breakdown voltage	$V(\text{BR})_{\text{CEO}}$	$I_{\text{C}}=10\text{mA}, I_{\text{B}}=0$	160		V
Emitter-base breakdown voltage	$V(\text{BR})_{\text{EBO}}$	$I_{\text{E}}=10\mu\text{A}, I_{\text{C}}=0$	6		V
Collector cut-off current	$I_{\text{CBO}}$	$V_{\text{CB}}=150\text{V}, I_{\text{E}}=0$		1	$\mu\text{A}$
Collector cut-off current	$I_{\text{CER}}$	$V_{\text{CB}}=150\text{V}, R_{\text{EB}}=10\text{M}\Omega$		10	$\mu\text{A}$
Emitter cut-off current	$I_{\text{EBO}}$	$V_{\text{EB}}=6\text{V}, I_{\text{C}}=0$		1	$\mu\text{A}$
DC current gain	$h_{\text{FE1}}$	$V_{\text{CE}}=5\text{V}, I_{\text{C}}=200\text{mA}$	60	320	
	$h_{\text{FE2}}$	$V_{\text{CE}}=5\text{V}, I_{\text{C}}=10\text{mA}$	40		
Collector-emitter saturation voltage	$V_{\text{CE(sat)}}$	$I_{\text{C}}=500\text{mA}, I_{\text{B}}=50\text{mA}$		1	V
Base-emitter voltage	$V_{\text{BE}}$	$I_{\text{C}}=5\text{mA}, V_{\text{CE}}=5\text{V}$		0.75	V
Transition frequency	$f_{\text{T}}$	$V_{\text{CE}}=5\text{V}, I_{\text{C}}=200\text{mA}$	20		MHz



### CLASSIFICATION OF $h_{\text{FE1}}$

Rank	R	O	Y
Range	60-120	100-200	160-320

# Typical Characteristics

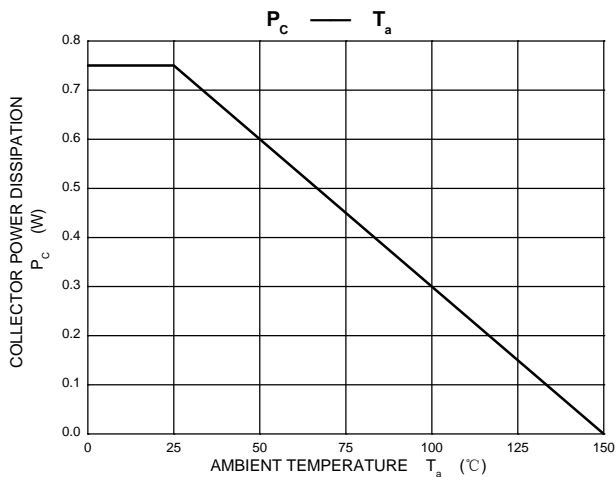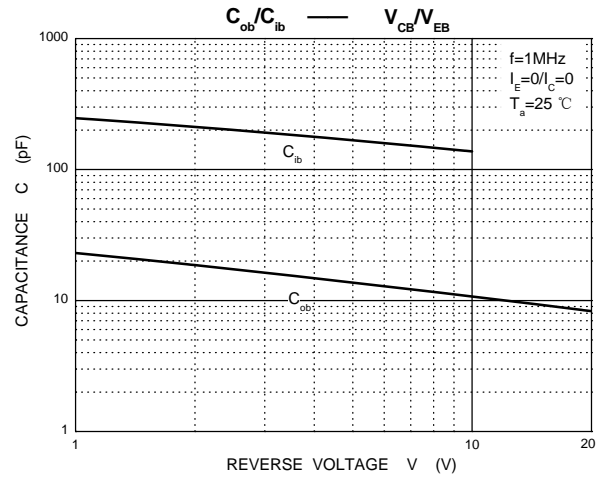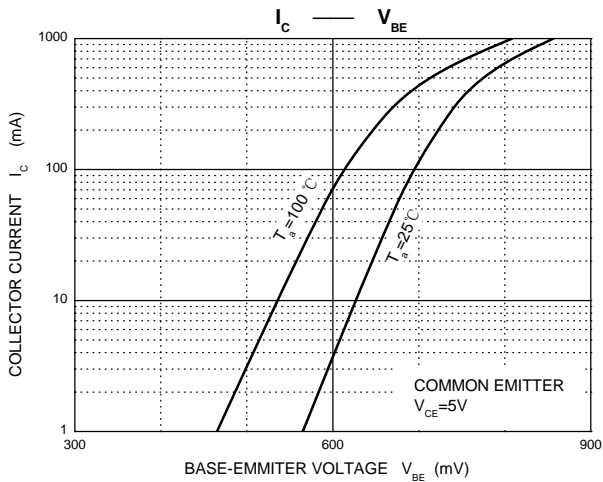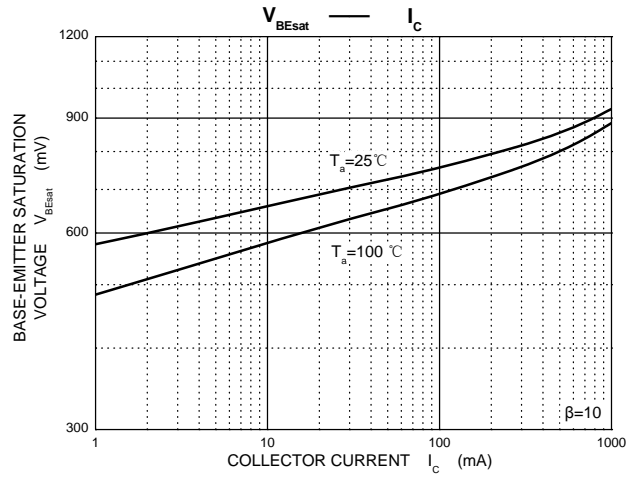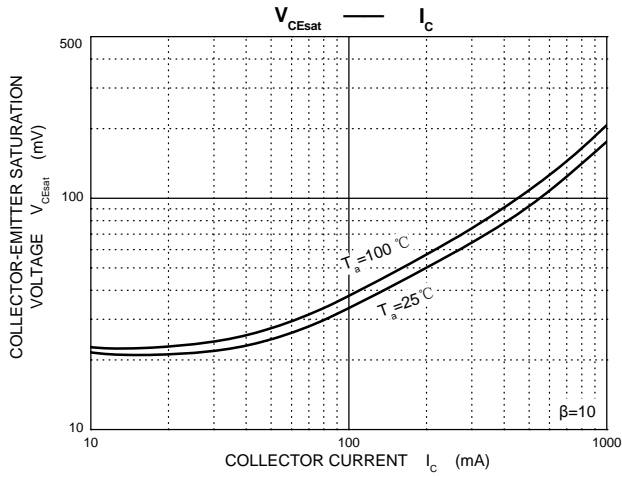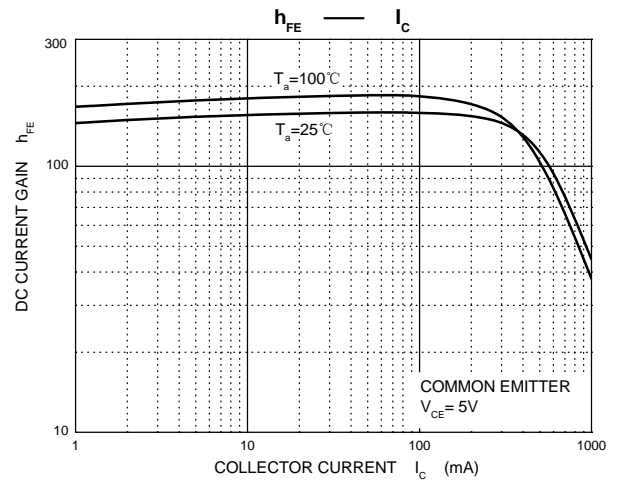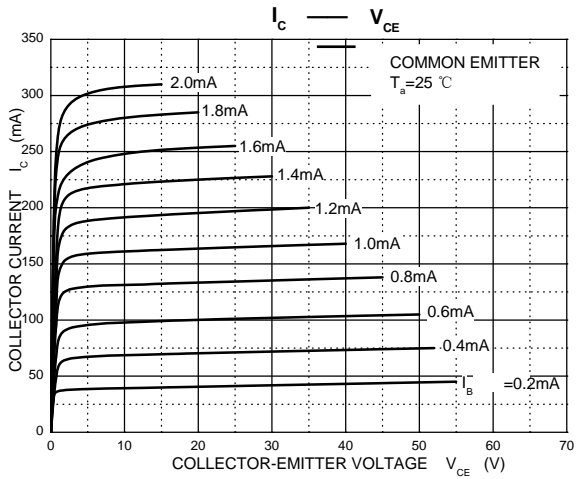


## TO-92L Package Outline Dimensions

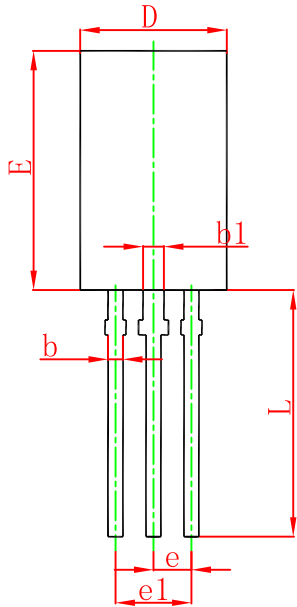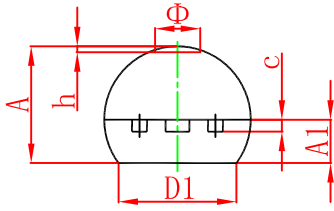

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	3.750	4.050	0.148	0.159
A1	1.280	1.580	0.050	0.062
b	0.380	0.550	0.015	0.022
b1	0.620	0.780	0.024	0.031
c	0.350	0.450	0.014	0.018
D	4.750	5.050	0.187	0.199
D1	4.000		0.157	
E	7.850	8.150	0.309	0.321
e	1.270 TYP.		0.050 TYP.	
e1	2.440	2.640	0.096	0.104
L	13.800	14.200	0.543	0.559
$\Phi$		1.600		0.063
h	0.000	0.300	0.000	0.012

## TO-92L Suggested Pad Layout

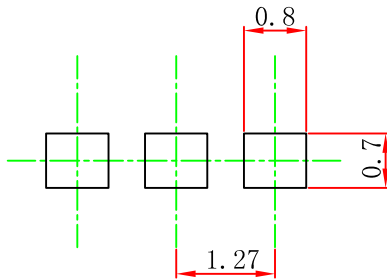


### Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05$ mm.
3. The pad layout is for reference purposes only.


### NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

# TO-92L PACKAGE TAPING DIMENSION

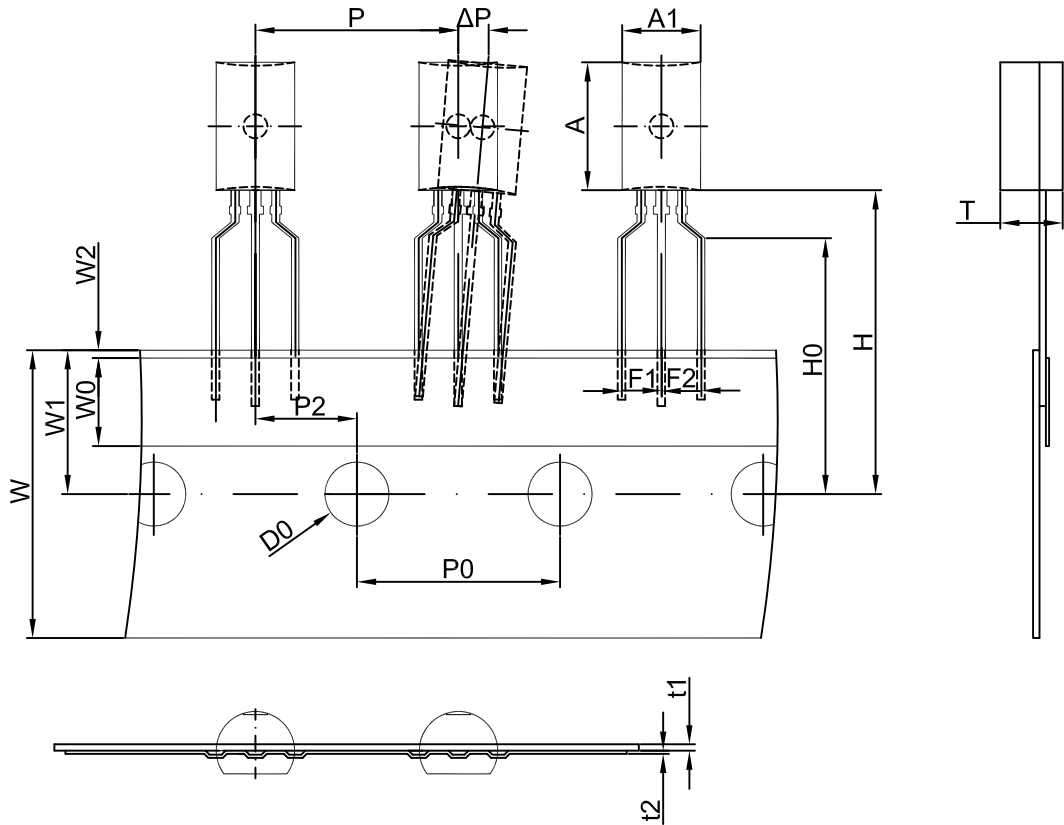

Dimensions are in millimeter								
A1	A	T	P	P0	P2	F1	F2	W
4.9	8.0	3.9	12.7	12.7	6.35	2.5	2.5	18.0
W0	W1	W2	H	H0	D0	t1	t2	ΔP
6.0	9.0	1.0	19.0	16.0	4.0	0.4	0.2	0

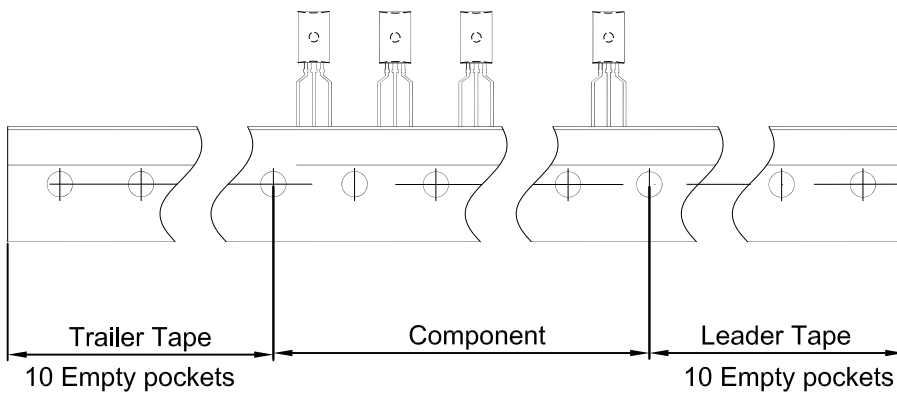

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92L	2000 pcs	333×203×42	20,000 pcs	493×400×264