



## AD-ESDBL7V0Y1 Plastic-Encapsulated Diode

### AD-ESDBL7V0Y1 Bi-direction ESD protection diode


#### DESCRIPTION

To protect voltage sensitive electronic components from ESD and other transients. Excellent clamping capability, low leakage, low capacitance and fast response time provide best in class protection on designs which are exposed to ESD.

The combination of small size, low capacitance and high level of ESD protection makes the product a flexible solution for applications such as HDMI, Display Port TM, and MDDI interfaces. It is designed to replace multiplayer varistors (MLV) in consumer equipment applications such as mobile phone, notebook, PAD, STB, LCD TV etc. .

#### FEATURES


- Bi-directional ESD protection of one line
- Reverse stand-off voltage: 7.0V
- Low reverse clamping voltage
- Low leakage current
- Excellent package: 1.0mm×0.6mm×0.5mm
- Fast response time
- JESD22-A114-B ESD rating of class 3B per human body model
- IEC 61000-4-2 level 4 ESD protection
- AEC-Q101 qualified

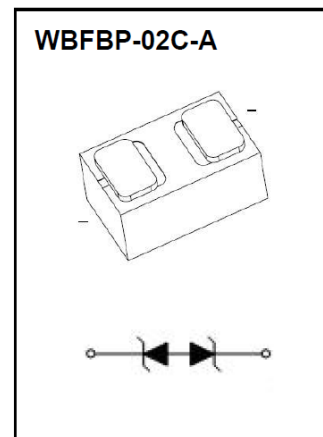

#### APPLICATIONS

- Computers and peripherals
- Power lines
- Audio and video equipment
- Cellular handsets and accessories
- Tablets
- Portable electronics
- Other electronics equipment communication systems

**MARKING**

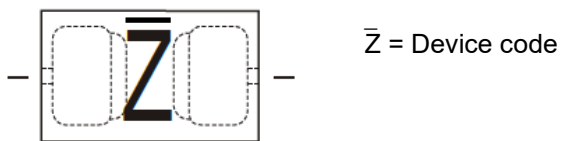


**MAXIMUM RATINGS ( $T_j = 25^\circ\text{C}$  unless otherwise specified)**

| Parameter  | Symbol                | Value         | Unit             |
|--|-----------------------|---------------|------------------|
| IEC 61000-4-2 ESD voltage                            | $V_{\text{ESD}}^{1)}$ | Air model     | $\pm 25$         |
|  |                       | Contact model | $\pm 25$         |
| JESD22-A114-B ESD voltage per human body model       |                       | $\pm 16$      |                  |
| ESD voltage per machine model                        |                       | $\pm 0.4$     |                  |
| Peak pulse power                                     | $P_{\text{PP}}^{2)}$  | 85            | W                |
| Peak pulse current                                   | $I_{\text{PP}}^{2)}$  | 5             | A                |
| Maximum lead solder temperature (10 second duration) | $T_L$                 | 260           | $^\circ\text{C}$ |
| Operation junction and storage temperature range     | $T_j, T_{\text{stg}}$ | -55 ~ 150     | $^\circ\text{C}$ |

**ESD STANDARD COMPLIANCE**

**IEC61000-4-2 standard**


| Contact discharge |                   | Air discharge |                   |
|-------------------|-------------------|---------------|-------------------|
| Level             | Test voltage (kV) | Level         | Test voltage (kV) |
| 1                 | 2                 | 1             | 2                 |
| 2                 | 4                 | 2             | 4                 |
| 3                 | 6                 | 3             | 8                 |
| 4                 | 8                 | 4             | 15                |

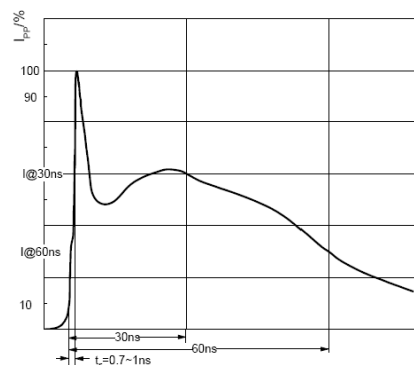

ESD pulse waveform according to IEC61000-4-2

**JESD22-A114-B standard**


| ESD class | Human body discharge (V) |
|-----------|--------------------------|
| 0         | 0 ~ 249                  |
| 1A        | 250 ~ 499                |
| 1B        | 500 ~ 999                |
| 1C        | 1000 ~ 1999              |
| 2         | 2000 ~ 3999              |
| 3A        | 4000 ~ 7999              |
| 3B        | 8000 ~ 15999             |

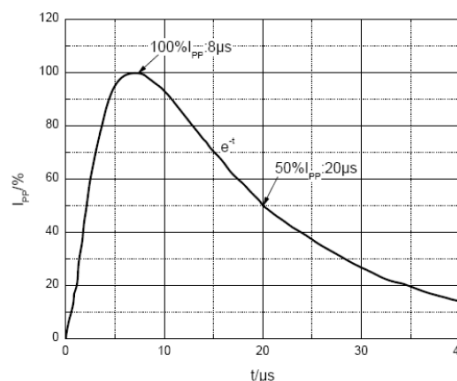

8/20µs pulse waveform according to IEC 61000-4-5

**ELECTRICAL CHARACTERISTICS ( $T_j = 25^\circ\text{C}$  unless otherwise specified)**

| Parameter                           | Symbol    |
|-------------------------------------|-----------|
| Clamping voltage @ $I_{PP}$         | $V_C$     |
| Peak pulse current                  | $I_{PP}$  |
| Breakdown voltage @ $I_T$           | $V_{BR}$  |
| Test current                        | $I_T$     |
| Reverse leakage current @ $V_{RWM}$ | $I_R$     |
| Reverse standoff voltage            | $V_{RWM}$ |

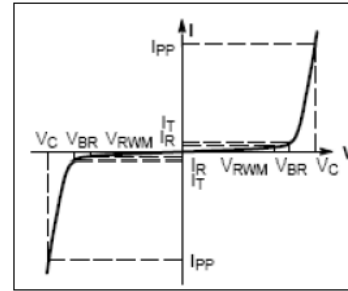**V-I characteristics for a Bi-directional TVS**


| Parameter                | Symbol         | Test condition              | Min | Typ | Max | Unit          |
|--------------------------|----------------|-----------------------------|-----|-----|-----|---------------|
| Reverse standoff voltage | $V_{RWM}^{1)}$ | -                           | -   | 7   | -   | V             |
| Reverse leakage current  | $I_R$          | $V_{RWM} = 7V$              | -   | -   | 1   | $\mu\text{A}$ |
| Breakdown voltage        | $V_{BR}$       | $I_T = 1\text{mA}$          | 8.2 | -   | -   | V             |
|                          |                | $I_T = 100\text{mA}$        | 7   | -   | -   | V             |
| Clamping voltage         | $V_C^{2)}$     | $I_{PP} = 5\text{A}$        | -   | -   | 17  | V             |
| Junction capacitance     | $C_J$          | $V_R = 0V, f = 1\text{MHz}$ | -   | 9   | -   | pF            |

1) Other voltages available upon request.


2) Non-repetitive current pulse 8/20 $\mu\text{s}$  exponential decay waveform according to IEC61000-4-5.

# TYPICAL CHARACTERISTICS


### Reverse Characteristics

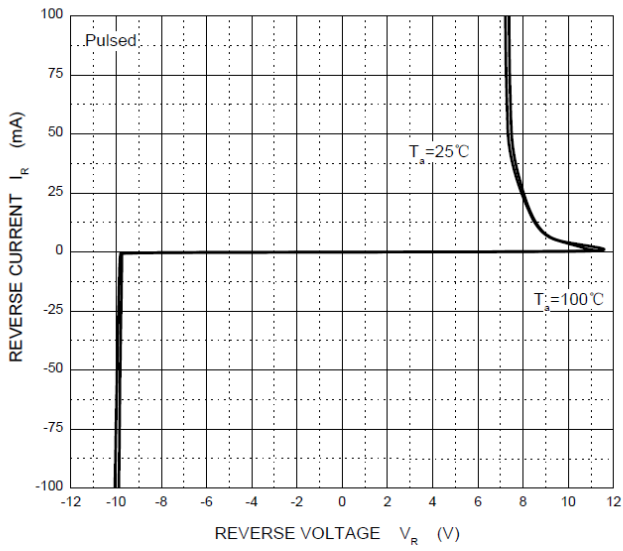


### Capacitance Characteristics

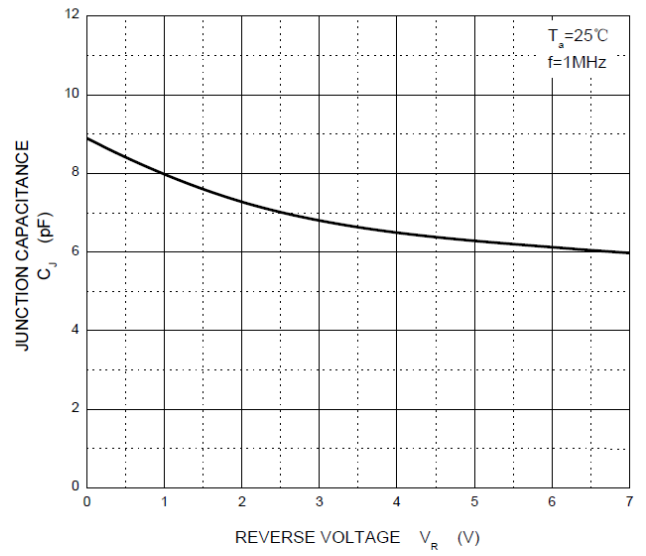

### $V_C$ — $I_{PP}$

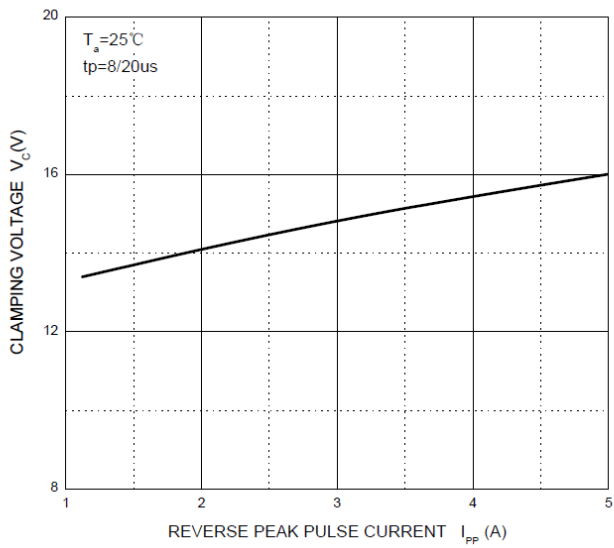


## WBFBP-02C-A PACKAGE OUTLINE DIMENSIONS

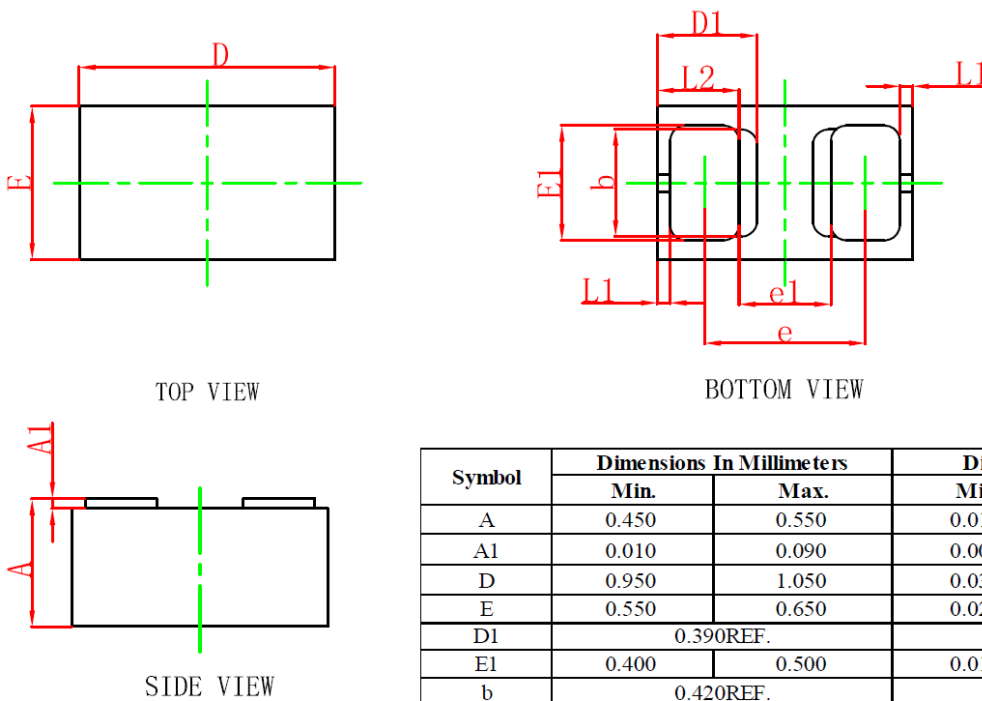

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min.                      | Max.  | Min.                 | Max.  |
| A      | 0.450                     | 0.550 | 0.018                | 0.022 |
| A1     | 0.010                     | 0.090 | 0.000                | 0.004 |
| D      | 0.950                     | 1.050 | 0.037                | 0.041 |
| E      | 0.550                     | 0.650 | 0.022                | 0.026 |
| D1     | 0.390REF.                 |       | 0.015REF.            |       |
| E1     | 0.400                     | 0.500 | 0.016                | 0.020 |
| b      | 0.420REF.                 |       | 0.017REF.            |       |
| e      | 0.580                     | 0.680 | 0.023                | 0.027 |
| e1     | 0.360REF.                 |       | 0.014REF.            |       |
| L1     | 0.050REF.                 |       | 0.002REF.            |       |
| L2     | 0.270                     | 0.370 | 0.011                | 0.015 |

## WBFBP-02C-A SUGGESTED PAD LAYOUT

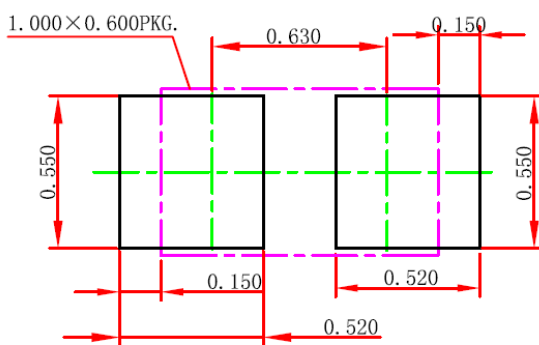


### Note:

1. Controlling dimension in millimeters.
2. General tolerance:  $\pm 0.05$ mm.
3. The pad layout is for reference purpose only.

# WBFBP-02C-A TAPE AND REEL


## DFN/FBP(1.0×0.6) Embossed Carrier Tape

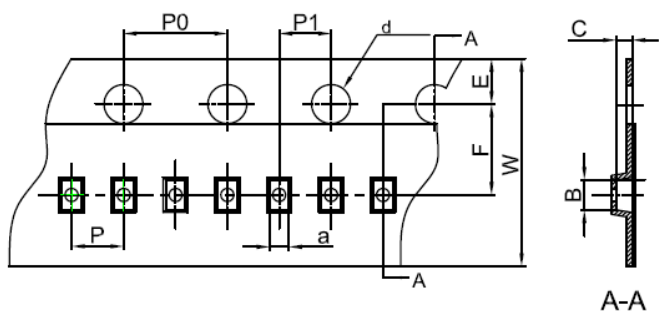


**Packaging Description:**  
**DFN/FBP(1.0×0.6)** parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive In nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 10,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

| Dimensions are in millimeter |      |      |      |       |      |      |      |      |      |      |
|------------------------------|------|------|------|-------|------|------|------|------|------|------|
| Pkg type                     | a    | B    | C    | d     | E    | F    | P0   | P    | P1   | W    |
| DFN/FBP(1.0×0.6)             | 0.66 | 1.15 | 0.66 | Ø1.50 | 1.75 | 3.50 | 4.00 | 2.00 | 2.00 | 8.00 |

## DFN/FBP(1.0×0.6) Tape Leader and Trailer

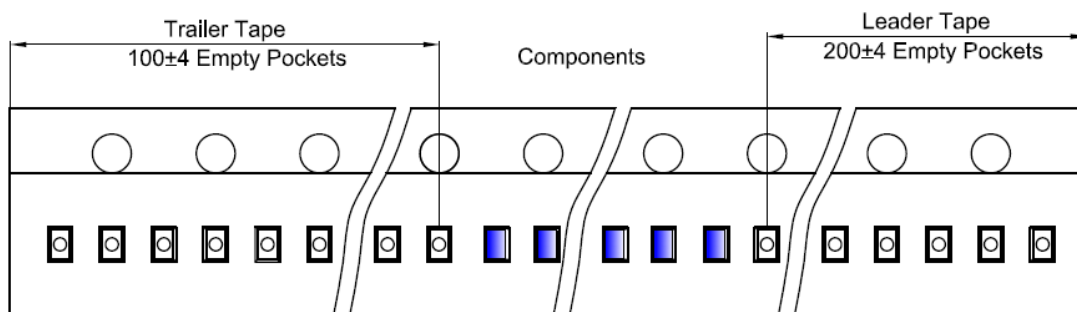

## DFN/FBP(1.0×0.6) Reel

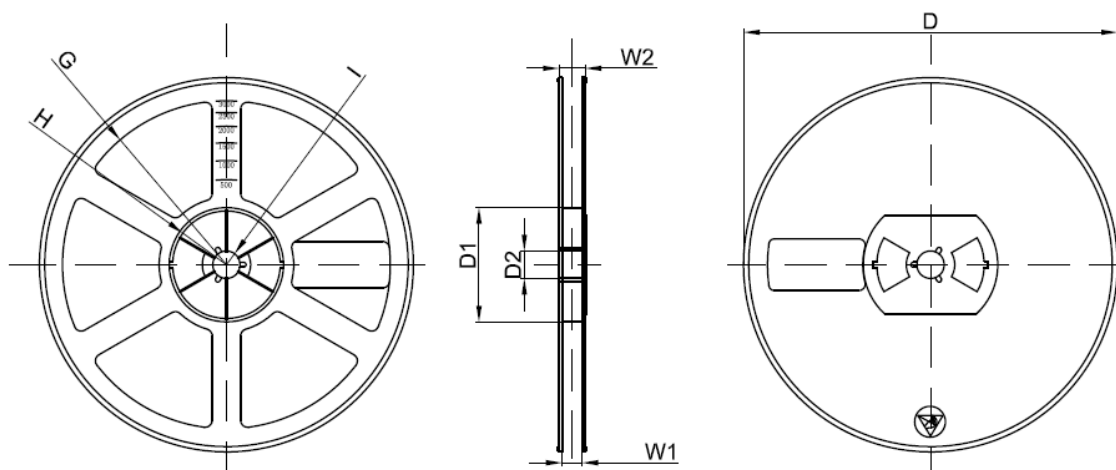

| Dimensions are in millimeter |         |       |       |        |        |       |      |       |
|------------------------------|---------|-------|-------|--------|--------|-------|------|-------|
| Reel Option                  | D       | D1    | D2    | G      | H      | I     | W1   | W2    |
| 7"Dia                        | Ø178.00 | 54.40 | 13.00 | R78.00 | R25.60 | R6.50 | 9.50 | 12.30 |

| REEL      | Reel Size | Box         | Box Size(mm) | Carton      | Carton Size(mm) | G.W.(kg) |
|-----------|-----------|-------------|--------------|-------------|-----------------|----------|
| 10000 pcs | 7 Inch    | 150,000 pcs | 203×203×195  | 600,000 pcs | 438×438×220     |          |

---

**PUBLISHED BY****JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD.**

13th Floor, C Block, Tengfei Building, Yan Chuang Yuan, Nanjing Jiangbei New Area, China

**LEGAL DISCLAIMER**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples, hints or typical values stated herein and/or any information regarding the application of the device, JSCJ hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of JSCJ in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

**INFORMATION**

For further information on technology, delivery terms and conditions as well as prices, please contact your nearest JSCJ office ([www.jscj-elec.com](http://www.jscj-elec.com)).

**WARNINGS**

Due to technical requirements, products may contain dangerous substances. For information on the types in question, please contact your nearest JSCJ office.

Except as otherwise explicitly approved by JSCJ in a written document signed by authorized representatives of JSCJ, JSCJ's products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.