



AD-SBD1060CT/SBDF1060CT Plastic-Encapsulated Diode

AD-SBD1060CT/SBDF1060CT Schottky barrier diode


MAIN CHARACTERISTICS

I_o	10A (2X5A)
V_{RRM}	60V
T_j	150°C
$V_{F(typ)}$	0.56V (@ $T_j = 125^\circ\text{C}$)


FEATURES

- Low power loss, high efficiency
- High current capability and low forward voltage drop
- Guard ring die construction for transient protection
- AEC-Q101 qualified

MARKING

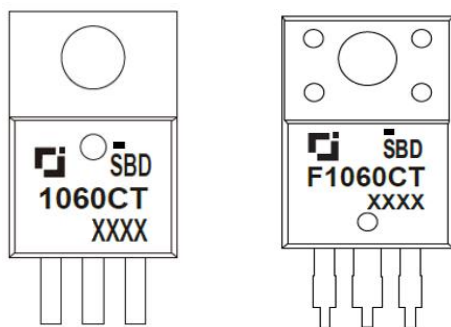

SBD(F)1060CT = Device code
XXXX = Date code

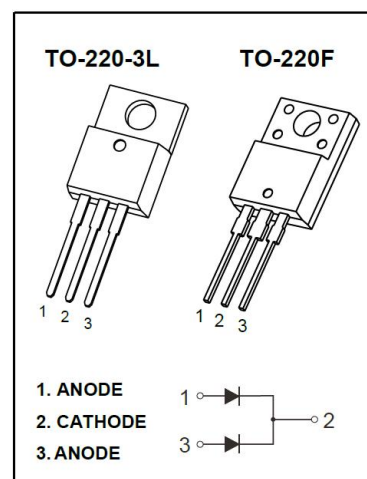

MAXIMUM RATINGS ($T_j = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value		Unit
		AD-SBD1060 CT	AD-SBDF1060 CT	
Peak repetitive reverse voltage	V_{RRM}	60		V
Working peak reverse voltage	V_{RWM}			
DC blocking voltage	V_R			
RMS reverse voltage	$V_{R(RMS)}$	42		V
Average rectified output current	I_o	10		A
Non-repetitive peak forward surge current @ $t = 8.3\text{ms}$	I_{FSM}	120		A
Thermal resistance from junction to case	$R_{\theta JC}$	2.0	3.0	$^\circ\text{C/W}$
Thermal resistance from junction to ambient	$R_{\theta JA}$	62.5		$^\circ\text{C/W}$
Operating junction temperature range	T_j	150		$^\circ\text{C}$
Storage temperature range	T_{stg}	-55 ~ 150		$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_j = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test condition	Min	Typ	Max	Unit	
Reverse breakdown voltage	$V_{(BR)}$	$I_R = 0.1\text{mA}$	60	-	-	V	
Reverse voltage leakage current	I_R	$V_R = 60\text{V}$	$T_j = 25^\circ\text{C}$	-	10	100	μA
			$T_j = 125^\circ\text{C}$	-	10	-	mA
Forward voltage	V_{F1}	$I_F = 3\text{A}$	$T_j = 25^\circ\text{C}$	-	0.57	-	V
			$T_j = 125^\circ\text{C}$	-	0.50	-	
	V_{F2}	$I_F = 5\text{A}$	$T_j = 25^\circ\text{C}$	-	0.67	0.70	
			$T_j = 125^\circ\text{C}$	-	0.56	-	

TYPICAL CHARACTERISTICS

FIG.1: FORWARD CURRENT DERATING CURVE

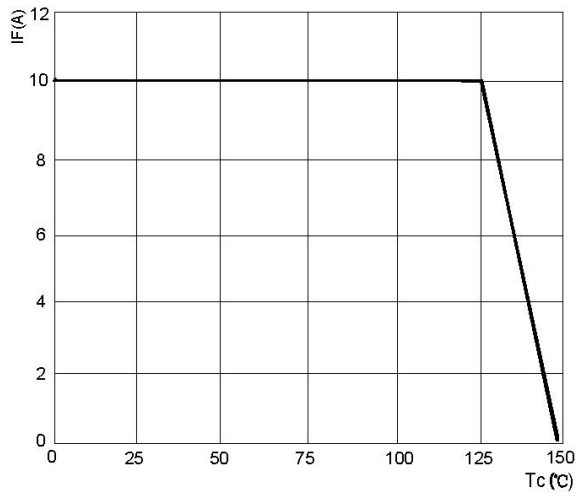


FIG.2: TYPICAL FORWARD CHARACTERISTICS

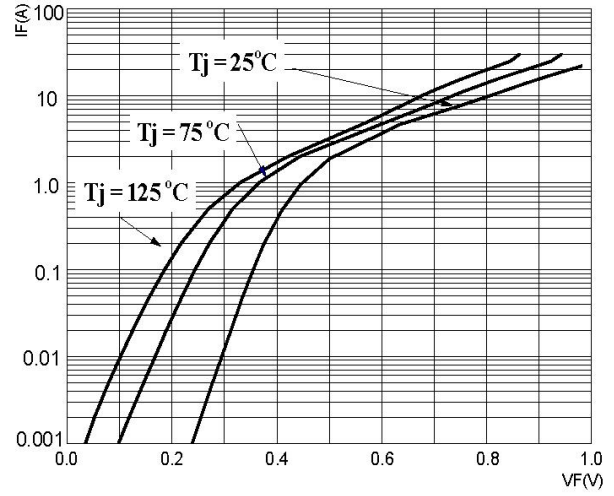


FIG.3: TOTAL CAPACITANCE DERATING CURVE



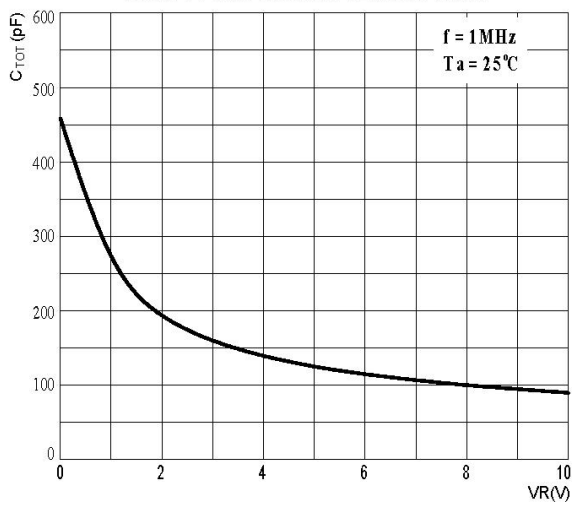


FIG.4: TYPICAL REVERSE CHARACTERISTICS

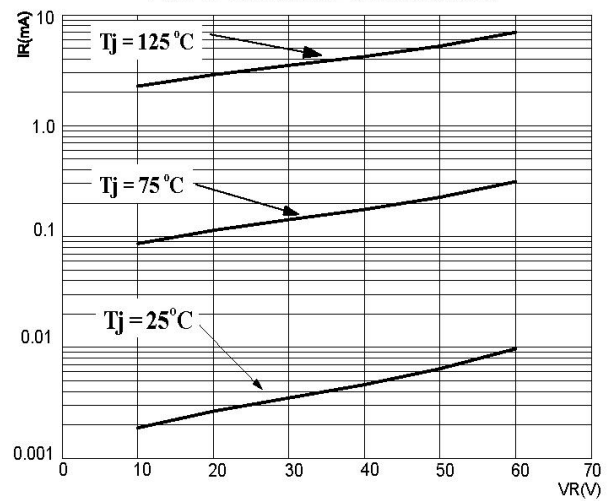


TO-220-3L PACKAGE OUTLINE DIMENSIONS

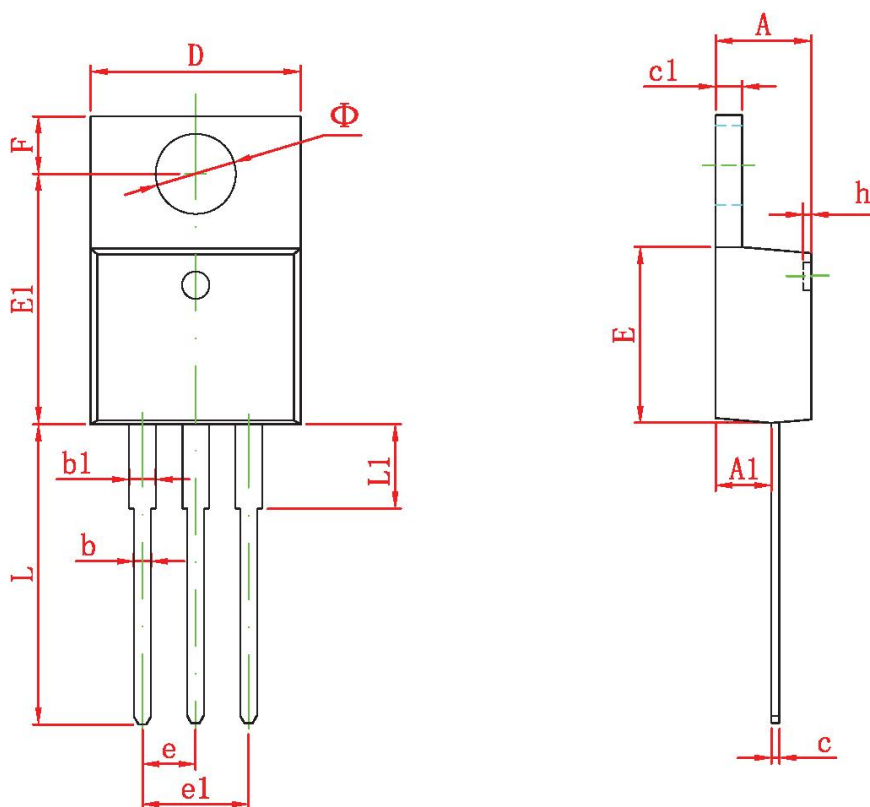

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.450	4.750	0.175	0.187
A1	2.520	2.820	0.099	0.111
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.300	0.500	0.012	0.020
c1	1.170	1.370	0.046	0.054
D	9.830	10.330	0.387	0.407
E	8.500	8.900	0.335	0.350
E1	12.050	12.650	0.474	0.498
e	2.540 TYP		0.100 TYP	
e1	4.900	5.200	0.192	0.205
F	2.540	2.940	0.100	0.116
h	0.100 TYP		0.004 TYP	
L	13.300	13.800	0.523	0.543
L1	3.540	3.940	0.139	0.155
Φ	3.735	3.935	0.147	0.155

TO-220F PACKAGE OUTLINE DIMENSIONS

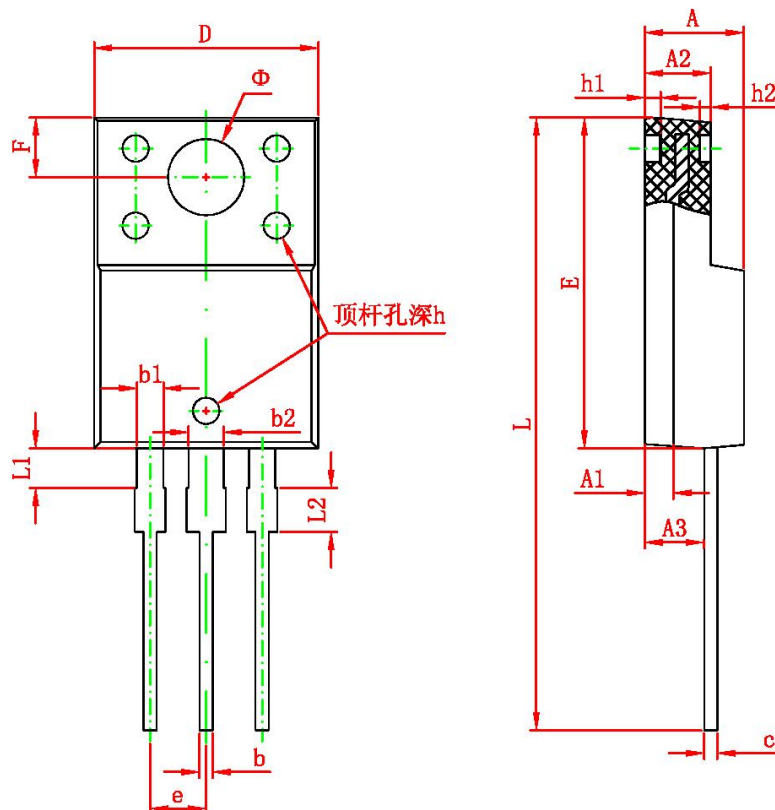

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.300	4.700	0.169	0.185
A1	1.300 REF.		0.051 REF.	
A2	2.800	3.200	0.110	0.126
A3	2.500	2.900	0.098	0.114
b	0.500	0.750	0.020	0.030
b1	1.100	1.350	0.043	0.053
b2	1.500	1.750	0.059	0.069
c	0.500	0.750	0.020	0.030
D	9.960	10.360	0.392	0.408
E	14.800	15.200	0.583	0.598
e	2.540 TYP.		0.100 TYP.	
F	2.700 REF.		0.106 REF.	
Φ	3.500 REF.		0.138 REF.	
h	0.000	0.300	0.000	0.012
h1	0.800 REF.		0.031 REF.	
h2	0.500 REF.		0.020 REF.	
L	28.000	28.400	1.102	1.118
L1	1.700	1.900	0.067	0.075
L2	1.900	2.100	0.075	0.083

PUBLISHED BY**JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD.**

13th Floor, C Block, Tengfei Building, Yan Chuang Yuan, Nanjing Jiangbei New Area, China

LEGAL DISCLAIMER

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples, hints or typical values stated herein and/or any information regarding the application of the device, JSCJ hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of JSCJ in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

INFORMATION

For further information on technology, delivery terms and conditions as well as prices, please contact your nearest JSCJ office (www.jscj-elec.com).

WARNINGS

Due to technical requirements, products may contain dangerous substances. For information on the types in question, please contact your nearest JSCJ office.

Except as otherwise explicitly approved by JSCJ in a written document signed by authorized representatives of JSCJ, JSCJ's products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.